

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number  
**WO 2005/028744 A1**

(51) International Patent Classification<sup>7</sup>: **D21C 9/16**,  
C08B 1/00, D21B 1/14, D21H 11/16

(21) International Application Number:  
PCT/IB2004/003080

(22) International Filing Date:  
22 September 2004 (22.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/668,387 23 September 2003 (23.09.2003) US

(71) Applicant (for all designated States except US): **INTERNATIONAL PAPER COMPANY** [US/US]; 400 Atlantic Street, Stamford, CT 06921 (US).

(72) Inventors: **TAN, Zheng**; c/o International Paper Company, 400 Atlantic Street, Stamford, CT 06921 (US). **NGUYEN, Xuan**; c/o International Paper Company, 400 Atlantic Street, Stamford, CT 06921 (US). **MAURER, Karen, L.**; c/o International Paper Company, 400 Atlantic Street, Stamford, CT 06921 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CHEMICAL ACTIVATION AND REFINING OF SOUTHERN PINE KRAFT FIBERS

(57) Abstract: A method for alteration of the morphology of cellulose fibers, particularly softwood fibers, by (a) subjecting the fibers to a metal ion-activated peroxide treatment carried out at a pH of between about 1 and about 9, preferably between 3 and 7, and (b) subjecting the treated fibers to a refining treatment thereby converts SW fibers to HW-like fibers in many respects. The metal ion-activated peroxide treatment has been noted to act on pulp cellulose and hemi-cellulose, causing oxidation and oxidative degradation of cellulose fibers. The chemical treatment of the pulp, taken alone, is not sufficient to attain the desired modification of the morphology of the fibers, however, subsequent refining or like mechanical treatment of the chemically-treated fibers to achieve a given degree of refinement of the fibers requires dramatically less refining energy to achieve a desired end point of refinement and to impart other desirable properties to the pulp. A pulp of modified SW fibers and a mixture of HW fibers and modified HW fibers are disclosed.



**WO 2005/028744 A1**

## TITLE OF INVENTION

**Chemical Activation and Refining of Southern Pine Kraft Fibers**

## CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] Not Applicable

## 5 STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] Not Applicable

**BACKGROUND OF THE INVENTION**

[0003] This invention relates to papermaking and particularly to the treatment of  
cellulosic material preparatory to use of the treated material to manufacture paper  
10 web material.

[0004] As is well known in the art, paper is commonly formed from wood.  
Generally, the industry divides wood used in papermaking into two categories; namely  
hardwoods and softwoods. Softwood fibers (tracheids) come from needle-bearing  
conifer trees such as pine, spruce, alpine fir, and Douglas fir. Hardwood fibers are  
15 derived from deciduous trees of various varieties.

[0005] Among the distinguishing differences between hardwood (HW) fibers and  
softwood (SW) fibers are (a) the length of the individual cellulosic fibers of the wood, (b)  
the coarseness of the fibers, and (c) the stiffness or collapsibility of the fibers.

[0006] The morphology of softwood fibers, tends to limit the potential uses of the  
20 papers producible from such fibers. "Paper" as used herein includes webs or sheets  
without limitation as to the size or basis weight of the web or sheet. For example,  
either HW or SW paper may be employed as "bleached board" (useful in containers for  
consumer products, for example) or as "container board" or "liner board" (useful in  
corrugated boxes, for example). Printability of a paper is a major consideration with  
25 respect to the end use of the paper. SW fibers are notoriously problematic as respects

the printability of the paper produced from these fibers in that SW fiber papers tend to be inordinately porous, stiff, and must be treated specially to obtain a paper surface which is suitably printable.

**[0007]** It is well known in the art that HW and SW must be subjected to specific treatments for converting the wood into a fibrous slurry employed in the formation of a paper web. Softwoods are more plentiful and are more readily replaceable, as by tree farming. Softwoods in general are less costly. Thus, it is desirable that SW fibers be substituted for HW fibers wherever possible in papermaking. Southern pine, or mixtures of hardwoods and softwoods, are commonly examined as possible substitutes for end products which have heretofore been manufactured using hardwoods.

**[0008]** Heretofore, in attempts to utilize SW fibers in printable paper, it has been proposed to treat the pulped fibers with hydrolytic enzymes. Refining of the enzyme-treated fibers to alter their size, shape, degree of fibrillation, etc., have been employed. Enzyme treatments suffer from sensitivities of the enzyme to process conditions, and a tendency to become inactivated and/or to be carried forward into the papermaking equipment. The lack of cost-effectiveness has also been a long-standing issue.

**[0009]** Chemical treatments, such as hydrogen peroxide treatment, are commonly carried out under alkaline conditions for bleaching or brightening of wood pulps. This condition that is maximized for bleaching, usually does not correlate with the best conditions for maximum oxidation.

**[0010]** Smoothness and Formation are measures of, among other things, the printability of the paper. "Formation", as used as a paper characteristic usually, and herein, is a synonym for relative uniformity over a scale of some distance, e.g., 5 to 20 mm. Formation may be judged by viewing it with light from the back and other means. Both smoothness and formation are affected, among other things, fiber length, morphology and collapsibility.

**BRIEF SUMMARY OF THE INVENTION**

[0011] In accordance with one aspect of the present invention, it has been found that alteration of the morphology of cellulose fibers, particularly softwood fibers, by (a) subjecting the fibers to a metal ion-activated peroxide treatment carried out at a pH of between about 1 and about 9, preferably between 3 and 7, and (b) subjecting the treated fibers to a refining treatment converts SW fibers to HW-like fibers in many respects. The metal ion-activated peroxide treatment has been noted to act on pulp cellulose and hemi-cellulose, causing oxidation and oxidative degradation of cellulose fibers. The chemical treatment of the pulp, taken alone, is not sufficient to attain the desired modification of the morphology of the fibers, however, subsequent refining or like mechanical treatment of the chemically-treated fibers to achieve a given degree of refinement of the fibers requires dramatically less refining energy, e.g., between about 30 and 50% less energy to achieve a desired end point of refinement. The pulp treated in accordance with the present invention demonstrates substantially reduced fiber length or fiber length distribution, thereby enabling better uniformity of paper sheet (web) structure as measured by formation or texture. Moreover, the treated fibers are more collapsible during sheet consolidation and result in significantly improved paper surface properties such as smoothness. In these respects, SW fibers treated in accordance with the present invention are substantially functionally equivalent to HW fibers in regards to their usefulness in papermaking. The treatment of the present invention may be applied to wood chemical pulps (or pulp mixtures) having various processing histories such as pulping, bleaching or acid hydrolysis, or other combinations of processing of wood into pulp suitable for infeed to a papermaking machine.

[0012] In one embodiment, the present invention may be applied to pulp which has already been subjected to refining, chemical treatment, enzyme treatment, microfibrillation, and/or acid hydrolysis, for example, to increase the pulp freeness or improve drainage during the papermaking process and/or to reduce the cellulose particles suspension viscosity and improving flow characteristic.

[0013] In a further embodiment, the advantages of the present invention may be achieved employing a hypochlorite treatment at pH 3 - 9, preferably, pH 3-8 and

employing hypochlorous acid as the dominate active agent, followed by subsequent refining of the treated pulp.

[0014] Moreover, either the metal ion-activated peroxide or the hypochlorous acid treatment may be applied alone to refined fibers for increased freeness/drainage, or on  
5 micro-fibrillated cellulose materials for reduced suspension viscosity. Further, either embodiment may be employed as a means for controlling the viscosity of a pulp suspension at any of various locations between the initial digestion of the cellulose material to and including the feeding of the pulp suspension into a papermaking machine. This latter aspect of the present invention is applicable in the dissolution of  
10 pulp for viscose production, for example. In certain stances, the beneficial effects of the present invention are exhibited in the calendaring of a paper web or sheet formed from treated SW fibers or combinations of HW fibers and treated SW fibers.

[0015] In a still further embodiment, the present invention may be combined with a fiber fractionation process for the treatment of specific fiber fractions.

15 [0016] Paper produced employing pulp treated in accordance with the present invention exhibits tear strengths at HW levels, with little material deterioration of tensile strength. Improved bonding of the fibers within the sheet is also provided due to enhanced freeness.

#### **BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS**

20 [0017] The above-mentioned features of the invention will become more clearly understood from the following detailed description of the invention read together with the drawings in which:

Figure 1 is a graph depicting the energy savings attributable to the present invention when refining Southern Pine pulp;

25 Figure 2 is a graph depicting fiber length reduction achieved when treating Southern Pine pulp in accordance with the present invention;

Figure 3 is a graph depicting the shifting of fiber length distribution between treated and untreated softwood pulp in accordance with the present invention;

Figure 4 is a microphotograph depicting untreated pine fibers;

Figure 5, is a microphotograph depicting pine fibers treated in accordance  
5 with the present invention;

Figure 6 is a graph depicting the relationship of bulk vs. smoothness of hardwood pulp, untreated pine pulp and treated pine pulp;

Figure 7 is a graph depicting the relationship of bulk vs. freeness of the pulps depicted in Figure 6;

10 Figure 8 is a graph depicting the relationship of tear vs. freeness of the pulps depicted in Figure 6;

Figure 9 is a graph depicting bulk and smoothness relationship of untreated hardwood pulp, untreated pine pulp, and various mixtures of hardwood and softwood pulps;

15 Figure 10 is a graph depicting the fiber length reduction of untreated pine pulp and pulp treated in accordance with the present invention, employing low intensity disc refining;

Figure 11 is a graph depicting the energy savings associated with disc refining employed as a component of the present invention when processing treated  
20 and untreated pine pulp; and

Figure 12 is a graph depicting the relationship between fiber length reduction and the energy employed in refining untreated pulp and pulp treated in accordance with the present invention.

**DETAILED DESCRIPTION OF THE INVENTION**

[0018] In accordance with one aspect of the present invention, there is provided a method for the transformation of softwood fibers, particularly Southern pine fibers, into hardwood-like fibers. The method employs the steps of (a) subjecting a SW pulp containing cellulose and hemicellulose, to a solution containing a transitional metal ion and a peroxide at a pH of between about 1 and 9 for a time sufficient to oxidize a substantial portion of the cellulose/hemi-cellulose and to oxidatively degrade the cellulose fibers, and (b) subjecting the treated pulp to a refining operation. The pulp thus treated, when formed into a web on a papermaking machine exhibits many hardwood-like properties such as overall formability into a web having surface properties like webs formed from hardwood fibers employing conventional papermaking techniques.

[0019] In one embodiment of the present invention, softwood fibers obtained from coniferous trees, and particularly Southern pine trees, are converted into a pulp employing the kraft process in which the fibers are treated in a heated alkaline solution to substantially separate the fibers from their lignin binder, as is well known in the art. Whereas Southern pine fibers are particularly suitable for treatment employing the present invention, it is recognized that fibers from other coniferous trees may be employed. Further, the present invention may be advantageously employed with mixtures of SW and HW fibers, for example mixtures containing between about 50% and 90% by weight of SW pulp and between about 10% and 50% HW pulp.

[0020] The SW pulp or mixture of SW and HW pulps, prior to treatment thereof employing the present invention, may comprise pulp which has not undergone any conventional treatment of the pulp subsequent to the digestion step. However, the present invention is useful in treating pulps which, subsequent to digestion, have undergone substantially any of the commonly employed treatments of pulp such as an acid hydrolysis for removal of hexauronic acid, oxidation/bleaching employing oxygen and/or peroxide, or ozone, on the pulp and/or mechanical treatment of the pulp, ie., refining. In the most commonly contemplated process, the pulp or mixture of pulps,

to be subjected to the method of the present invention will be a pulp(s) which has been digested and at least washed to remove black liquor.

[0021] In accordance with one aspect of the present invention, the pulp solution, at a temperature of between about 40 and 120 degrees C, is subjected to a solution of a transitional metal-activated peroxide for between about 10 and 600 minutes. In general, a higher treatment temperature will require less residence time, and vice versa. It is preferable that the treatment be done at 70-79 degrees C, with a residence time between 30-180 minutes. The treatment (either continuous or batch) can be carried out in a bleach tower, high- density tower, re-pulper tanks, or any suitable vessel with sufficient mixing and residence time.

[0022] In a preferred embodiment, and contrary to the conventional peroxide treatment of pulp wherein transitional metal ions are avoided or eliminated to avoid pulp damage or degradation by hydroxyl radicals, the treatment solution of the present invention, includes between about 0.2% and about 5% by wt. hydrogen peroxide and between about 0.002% and about 0.1% of a transitional metal ions, based on pulp. Iron (III) salts such as ferric chloride, or iron (II) salts such as ferrous sulfate and ferrous chloride, are especially useful as a source of the metal ions. Other metal ions, such as copper (II), cobalt(II) may be employed. In any event, as noted, only a trace of the transitional metal ions is required to achieve the advantageous results of the present invention, preferably between about 0.002% and about 0.01% of the metal ion.

[0023] Further contrary to conventional peroxide treatment of pulp wherein the peroxide treatment is carried out with the pulp at a very high pH for bleaching, in the present invention, the pulp treatment is carried out at a pH of between about 1 and about 9, preferably a pH between about 2 and 7.

[0024] Subjection of softwood pulp to the solution of the present invention at a temperature between about 40 C and about 120 C and at a pH between about 1 and about 9, has been found to cause oxidation and oxidative pulp degradation of the long, stiff and coarse kraft fibers. This chemical treatment of the fibers is followed by a mechanical treatment of the treated pulp, e.g., refining employing a conventional disc



refiner, to cause fiber morphology change and paper property enhancement with respect to hardwood pulps. It will be understood by one skilled in the art that other mechanical treatment devices which provide equivalent refining of the pulp fibers may be employed.

- 5 **[0025]** Bleached southern pine Kraft pulp from International Paper-Augusta mill was treated at pH 4 with 1% hydrogen peroxide as based on pulp, with 0.01% Fe added as with ferric chloride. The treatment was conducted at the temperature of 80°C for 1 hour. Both the treated and the control (untreated) pine pulps were refined with a PFI refiner. The data on PFI freeness and average fiber length are shown in  
10 Table I

**TABLE I**

	PFI Revolutions	0 Rev.	2000 Revs.	4000 Revs.	6000 Revs
Control Southern Pine	Freeness	739 CSF	675 CSF	522 CSF	481 CSF
	Average Fiber Length, L(L)	2.50 mm	2.47 mm	2.47 mm	2.42 mm
Treated Southern Pine	Freeness	746 CSF	524 CSF	364 CSF	-
	Average Fiber Length, L(L)	2.37 mm	1.84 mm	1.64 mm	-

- [0026]** As shown in Figure 1, the results of refining revolution (indication of refining energy) vs. freeness development show that iron catalyzed hydrogen peroxide  
15 treatment of pulp enhances pulp refining considerably, resulting in substantial energy savings for reaching the same freeness level.

**[0027]** Figure 2 shows the fiber length reduction (length-weighted average) by refining and indicates that, with catalyzed hydrogen peroxide treatment before refining, the fiber length is substantially reduced after being subsequently refined.

While for comparison, the untreated pulp (control) showed little fiber length reduction by PFI refining.

[0028] Figure 3 further illustrates the fiber length reduction as shown in Figure 2. In Figure 3, there is demonstrated the fiber length distribution curves, with the treated vs. the untreated (control) southern pine, at the same refining. As seen, the treatment caused a significant shift of fiber length to shorter range than the control.

## EXAMPLE 2

[0029] Bleached southern pine as employed in Example 1 was treated with 1% hydrogen peroxide based on pulp at pH 4, with 0.006% Fe(II) as from ferrous sulfate. The treatment was carried out at the temperature of 70°C for 1 hour. The treated pulp and control were PFI refined as in Example 1. TAPPI hand sheets were then made from these pulps.

[0030] To illustrate fiber morphology (beyond fiber length distributions) and fiber collapsibility, SEM (scanning electron microscopy) images were made of the hand sheet surface of treated vs. the control (untreated) softwood pulps, compared at 4000 Revs of PFI refining. These microphotographs are depicted in Figures 4 (untreated) (control) and 5 (treated) and demonstrate that the treated pine fibers are much more collapsed, or flattened, as compared to the fiber of the control. The collapsed and flattened fibers are desirable for making paper or paperboard with superior surface and printing properties. Some broken or cut fibers (fiber ends) can also be seen from the SEM of treated hand sheet, indicating fiber shortening.

## EXAMPLE 3

[0031] Bleached southern pine pulp was treated with 1% hydrogen peroxide catalyzed by 0.006% Fe(II) at pH 4 as in the Example 2 above. The treated pulps were PFI refined, and made into hand sheets for paper physical property evaluations. Results are shown in Table II.

**Table II**

	Basis Weight, g/m <sup>2</sup>	Bulk, cc/g	Sheffield Smooth- ness	Tear Factor  100*gf /g/m <sup>2</sup>	Extensional Stiffness, lbs/in.
Treated Pine Pulp					
730CSF (Unrefined)	151.9	1.90	375.6	190.9	2960
556 CSF	155.2	1.34	165.3	111.9	4780
421 CSF	154.4	1.36	127.2	103.4	5050
304 CSF	155.2	1.26	129.7	98.1	5210
Control Pine Pulp					
740CSF (Unrefined)	162.4	1.91	380	270.9	3490
661 CSF	155.6	1.40	249.6	193.6	4020
625 CSF	159.9	1.35	185.3	188.7	4340
569 CSF	158.5	1.31	191.6	167.4	4540
443 CSF	155.9	1.27	157.8	170.2	4340
Bleached Hardwood Pulp					
615 CSF	166	1.88	333	52.3	2040
584 CSF	163.1	1.64	268.6	87.9	2520
544 CSF	164.9	1.53	224.4	100	2840
507 CSF	161.0	1.40	175.2	112.6	3030
462 CSF	160.5	1.36	142.2	126.9	3010
427 CSF	162.8	1.31	127.8	107.8	3480
362 CSF	163.9	1.273	89	123.6	3320

[0032] From this table, it is noted that the treated pine, after refined to ~560 CSF or lower freeness (to shorten the fibers also), show improved bulk-smoothness. This is also shown in Figure 6. Figure 7 depicts the bulk at given freeness, which suggests the advantage of refining the treated pine to lower freeness, such as 400 CSF (depending on drainage or furnish mix requirements on paper machines).

[0033] In terms of mechanical properties, the treatment impacted significantly the Tear strength, reducing it to the level of hardwood (Figure 8). This is acceptable when using the treated pine fibers to replace hardwood fibers in a paper furnish. The reduction in Tear results from significant fiber length reduction, and the effect of chemistry.

[0034] Other mechanical properties were only slightly affected, and remain substantially higher than hardwood furnish. Interestingly, as shown in Table II, the elastic stiffness of treated pine can even be higher than that of the control pine.

#### EXAMPLE 4

[0035] The treated pine as in Example 3 above, refined to 560 CSF, was also mixed with hardwood pulp of a range of freeness, to investigate the mixed furnish paper properties such as bulk and smoothness. The results are listed in Table III.

**Table III**

	Sheffield Smoothness	Bulk, cc/g
5  10% Treated Pine (560 CSF) + 90% Hardwood	323	1.83
	308	1.83
	171.2	1.37
	137.8	1.33
10  20% Treated Pine (560 CSF) + 80% Hardwood	302	1.75
	231.8	1.5
	182.8	1.43
	136.6	1.32
15  50% Treated Pine (560 CSF) + 50% Hardwood	318	1.79
	182.4	1.41
	163.4	1.38
	147.6	1.29

**[0036]** Figure 9 plots the bulk-smoothness curve of the mixed pulp furnish (data from Table III), along with 100% pine and hardwood curves (data from Table II). It is obvious that the treated pine can be used to replace substantial amounts of hardwood pulp. The exact amount of hardwood replacement in the paper mill, however, may also be affected somewhat by the nature, type and optimization of commercial refiners.

**EXAMPLE 5**

[0037] A Voith LR1 Disc Refiner was used to refine bleached southern pine which had been treated with 1% hydrogen peroxide, as catalyzed by Fe(III) at pH4. The refiner specific edge load was set at 0.8 Ws/m. As seen from Table IV, Figure 10, energy saving and fiber length reduction were confirmed.

**Table IV**

Refining Energy, kW.h/ton pulp	Treated Southern Pine		Control Southern Pine	
	Freeness	Kajaani average fiber length, L(L)	Freeness	Kajaani average fiber length, L(L)
0	750 CSF	2.07 mm	750 CSF	2.11 mm
46	677 CSF	2.05 mm	722 CSF	2.12 mm
78	610 CSF	1.98 mm	677 CSF	2.12 mm
118	455 CSF	1.84 mm	633 CSF	2.14 mm
158	317 CSF	1.66 mm	579 CSF	2.09 mm
198	197 CSF	1.48 mm	538 CSF	2.10 mm

**EXAMPLE 6**

[0038] A Voith LR1 Disc Refiner was used to refine bleached southern pine, which had been treated with 1% hydrogen peroxide, as catalyzed by Fe(II) at pH4. The refiner specific edge load was set at 4 km.

[0039] From Table V, Figures 11, 12, it is seen that energy saving and fiber length reduction were confirmed.

**Table V**

Treated Southern Pine					
Refining Energy, kW.h/ton	25	46	99	119	-
Freeness	590 CSF	442 CSF	185 CSF	115 CSF	-
Kajaani average length L(L)	1.9 mm	1.72 mm	1.4 mm	1.2 mm	-
Untreated Pine - Control					
Refining Energy, KW.h/ton	0	29	40	75	90
Freeness	730 CSF	671 CSF	657 CSF	-	522 CSF
Kajaani average length L(L)	2.14 mm	-	-	2.12	1.93

## CLAIMS

WHAT IS CLAIMED:

**Claim 1.** A method for modulating the morphology of cellulosic fibers comprising the steps of

5                   subjecting the fibers to a metal ion-activated peroxide treatment carried out at a pH of between about 1 and about 9 and

                  subjecting the treated fibers to a refining treatment.

**Claim 2.** The method of Claim 1 wherein said metal ion is a transitional metal ion.

**Claim 3.** The method of Claim 1 wherein said metal ion is iron.

10 **Claim 4.** The method of Claim 1 wherein said pH is between about 3 and about 7.

**Claim 5.** The method of Claim 1 wherein the fibers are subjected to the solution at temperatures between about 40 degrees C to about 120 degrees C.

**Claim 6.** The method of Claim 1 wherein the fibers are subjected to the solution for between about 10 minutes to about 10 hour.

15 **Claim 7.** The method of Claim 1 wherein said peroxide is present with said solution at a concentration of between about 0.2% and about 5% based on pulp.

**Claim 8.** The method of Claim 1 wherein said metal ion is present in said solution at a concentration of between about 0.002% and about 0.1% on pulp .

20 **Claim 9.** The method of Claim 1 wherein said pulp is subjected to said solution for a time sufficient to substantially act on at least the cellulose and hemi-cellulose of the pulp, causing oxidation and oxidative degradation of cellulose fibers.

**Claim 10.** A softwood pulp having a modified morphology , leading to paper making properties substantially functionally equivalent to hardwood pulp papermaking properties.



**Claim 11.** The softwood pulp of Claim 10 wherein the fibers of said softwood pulp, after treatment, exhibit a substantially shorter fiber length and distribution, and enhanced fiber collapsibility, than prior to treatment.

**Claim 12.** The softwood pulp of Claim 9 wherein said pulp is oxidatively degraded  
5 relative to untreated softwood pulp.

**Claim 13.** The softwood pulp of Claim 10 wherein the pulp exhibits a Canadian Standard Freeness of between about 115 and about 590.

**Claim 14.** The softwood pulp of Claim 13 wherein the pulp exhibits a Kajaani average fiber length of between about 1.0 and 1.9 mm.

10 **Claim 15.** A pulp comprising between about 50% and 90% hardwood pulp and the remainder being softwood pulp which has been subjected to a metal ion-activated peroxide treatment carried out at a pH of between about 2 and about 9 and a refining treatment.



**Claim 16.** The pulp of Claim 15 wherein said metal ion is a transitional metal.

15 **Claim 17.** The pulp of Claim 15 wherein said metal ion is iron and said pH is between about 3 and about 7.

**Claim 18.** The pulp of Claim 15 wherein said pulp is substantially functionally equivalent to a hardwood pulp as respects the usefulness of the pulp in papermaking.

**Claim 19.** The softwood pulp of Claim 11 wherein the pulp is used to manufacture  
20 a paper web material.

1/9

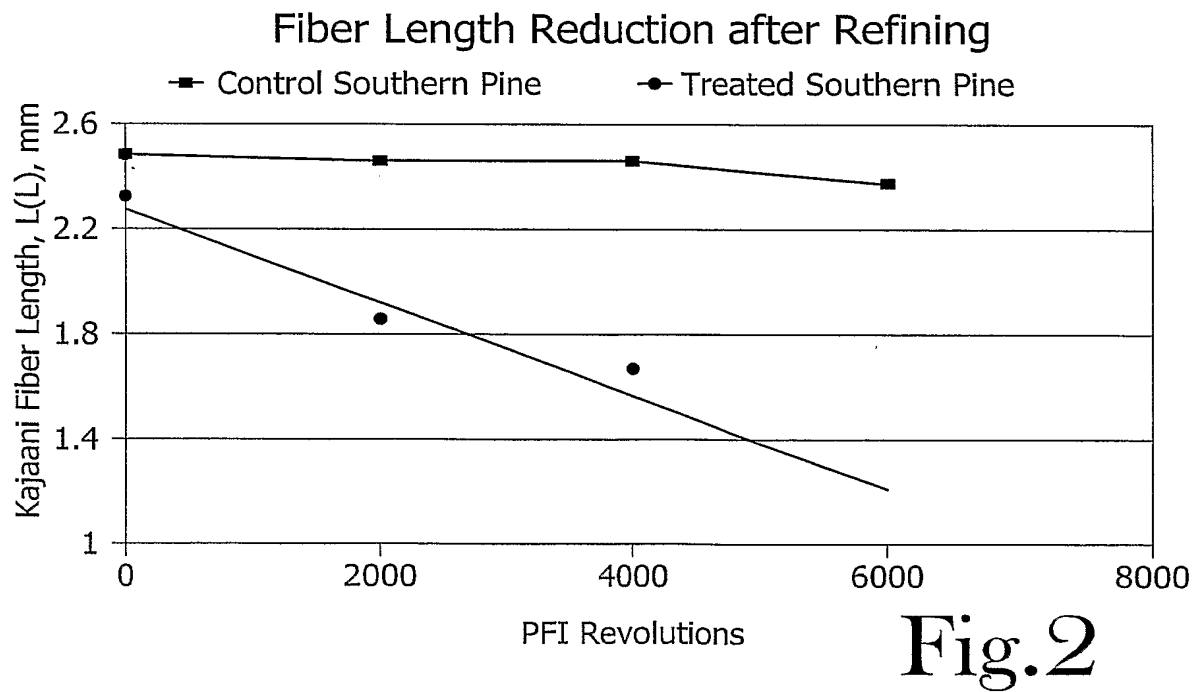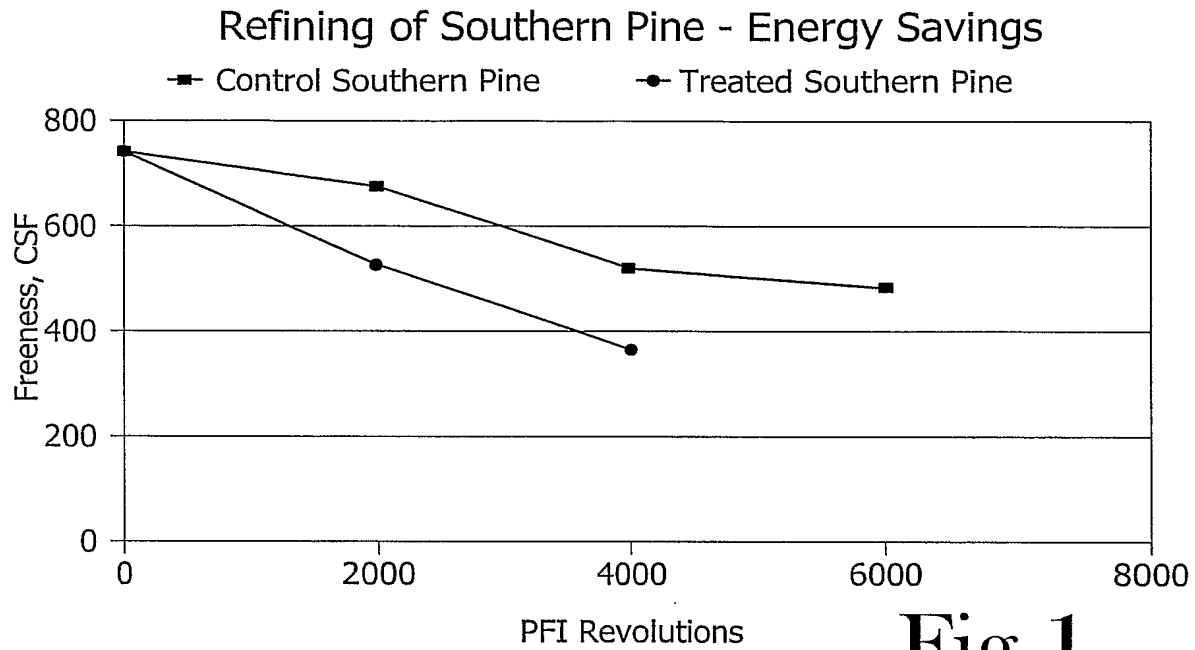

2/9

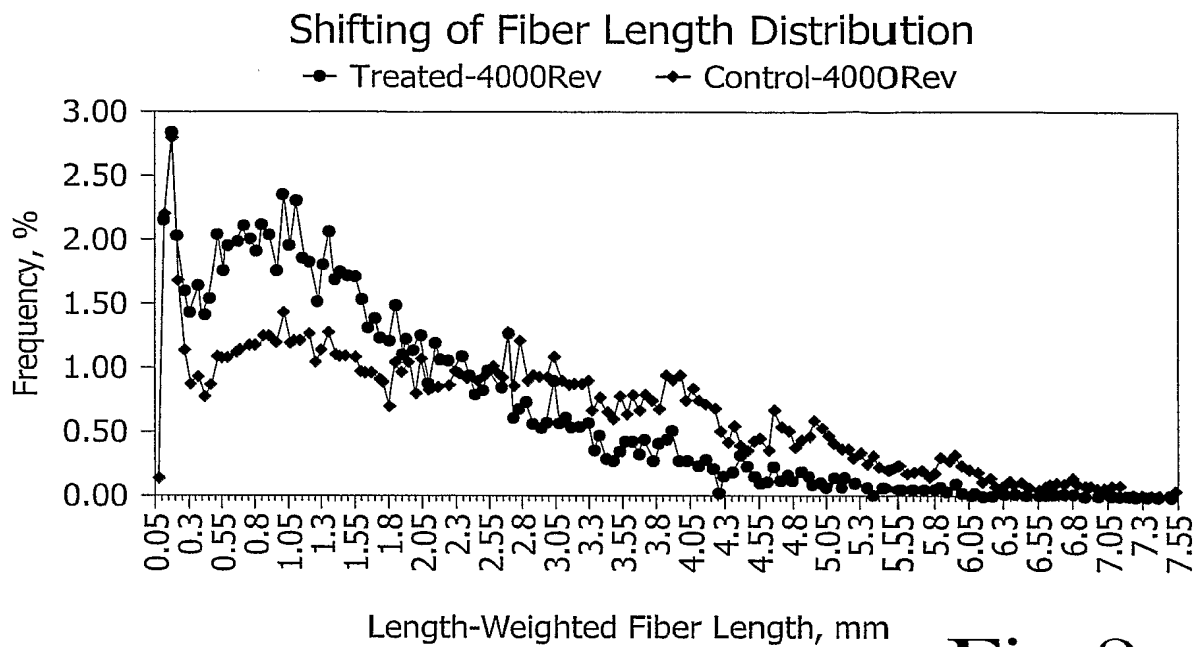


Fig.3

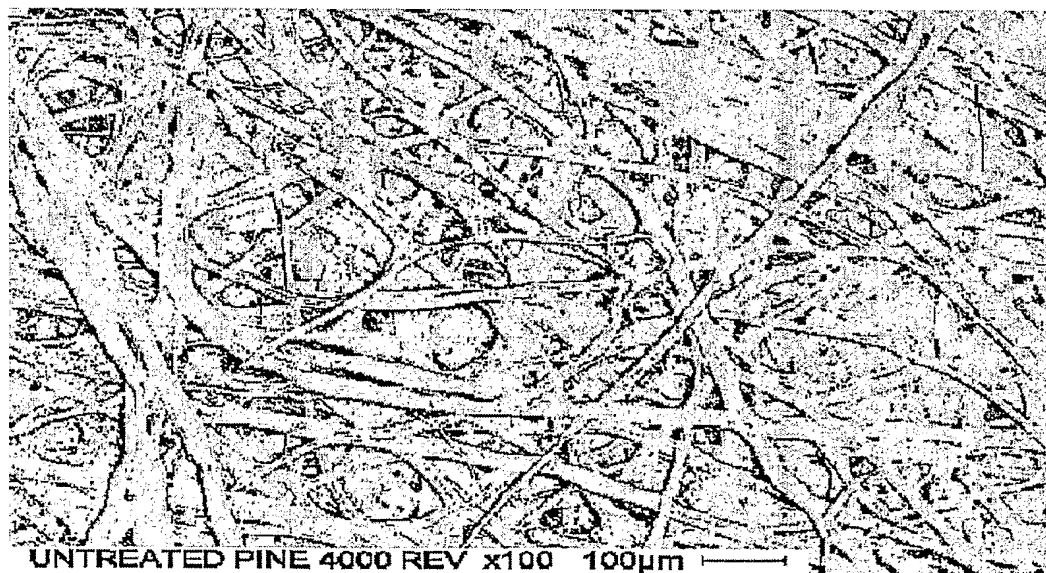


Fig.4

3/9

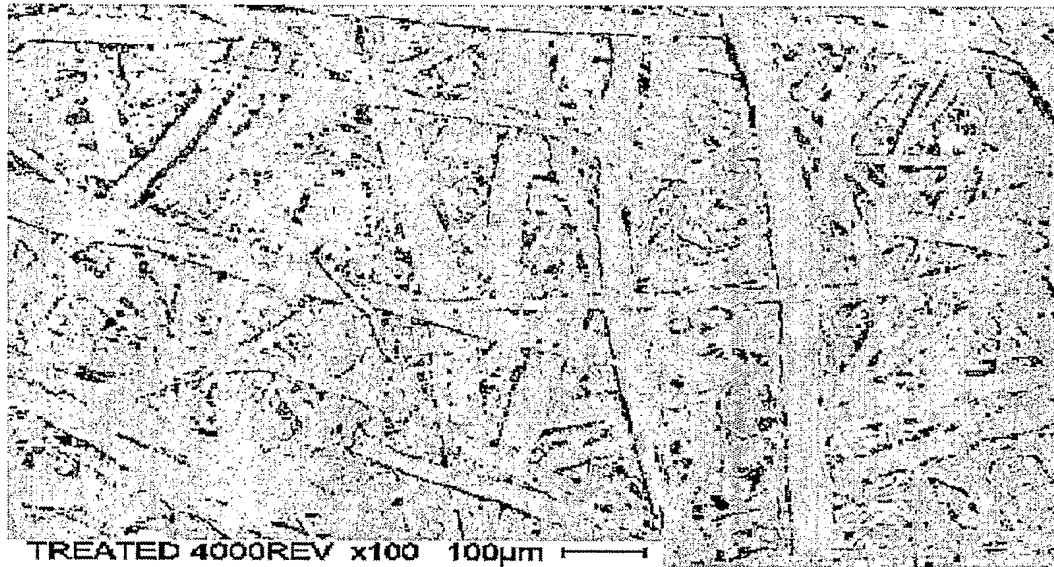


Fig.5

Augusta Pulp: Bulk vs. Smoothness by Refining

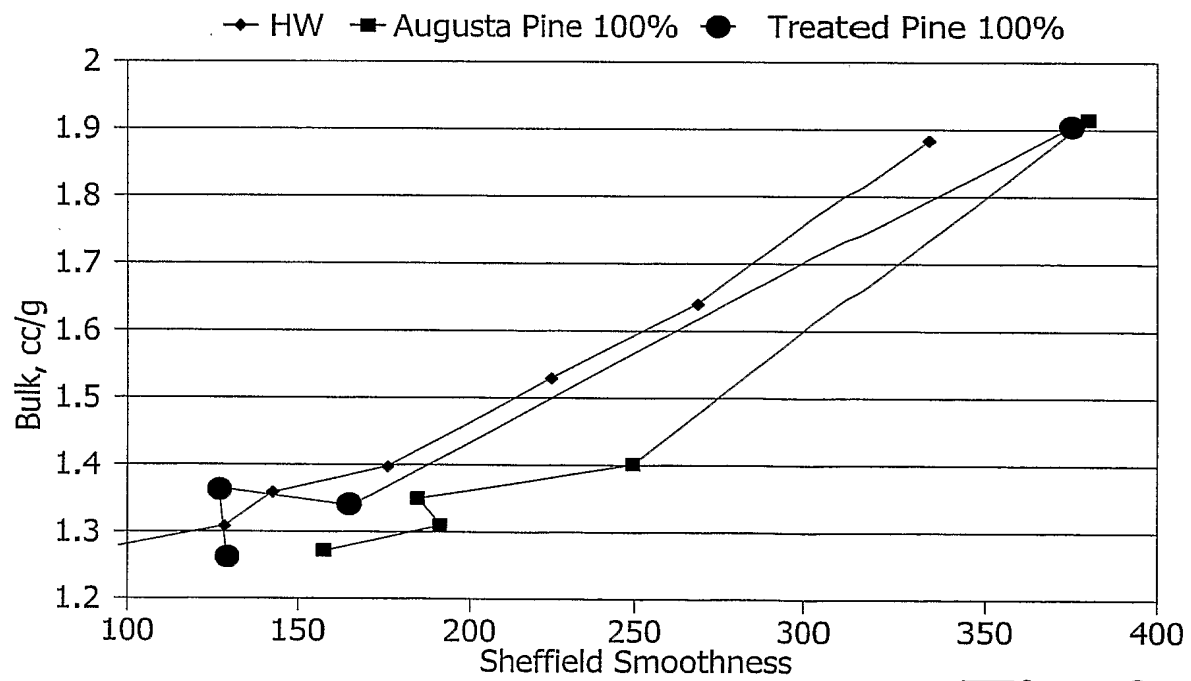
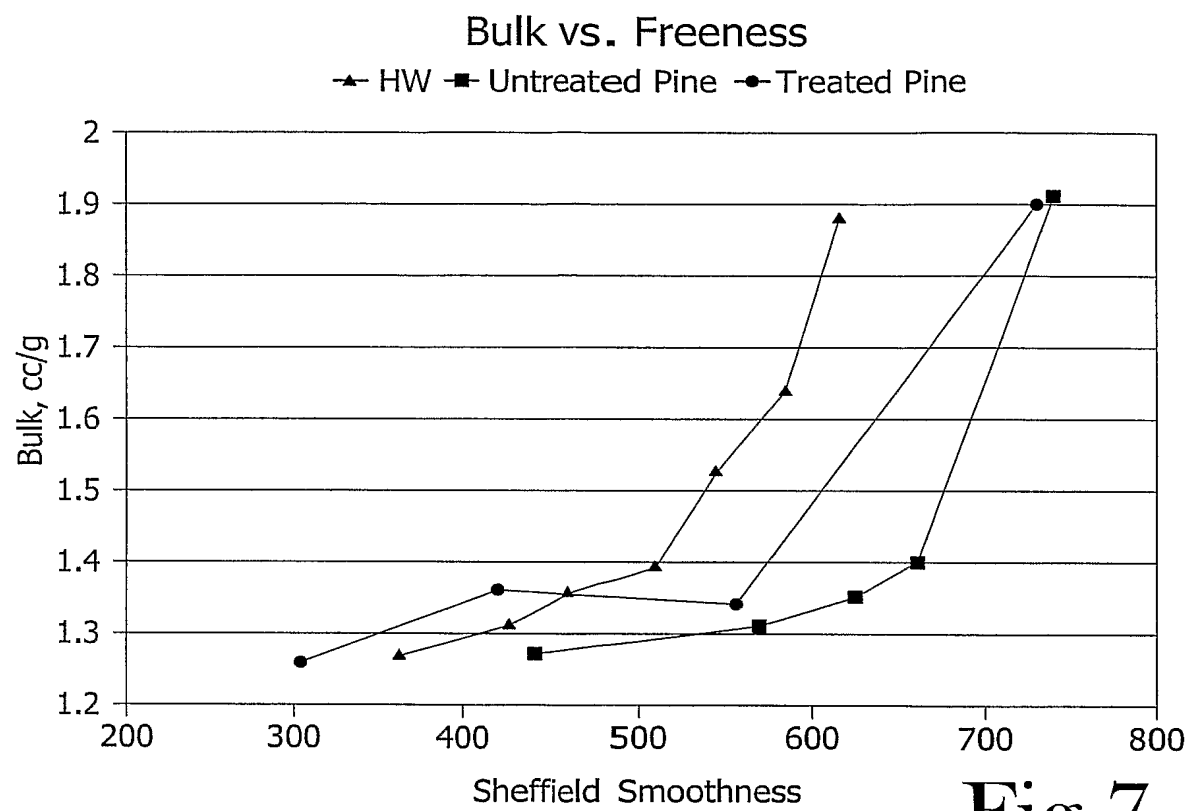
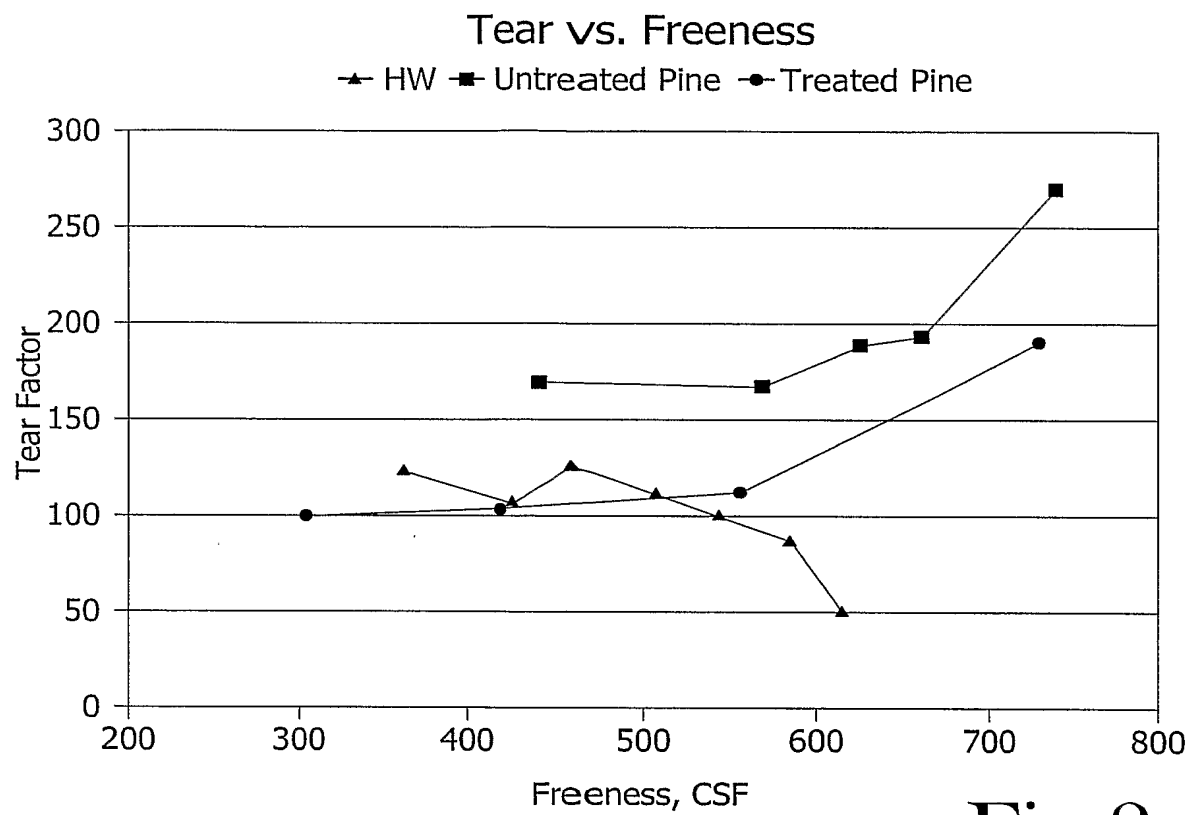


Fig.6

4/9


**Fig.7**

5/9

**Fig.8**


6/9

### Bulk-Smoothness: Treated Pine Mixed with Hardwood Pulp

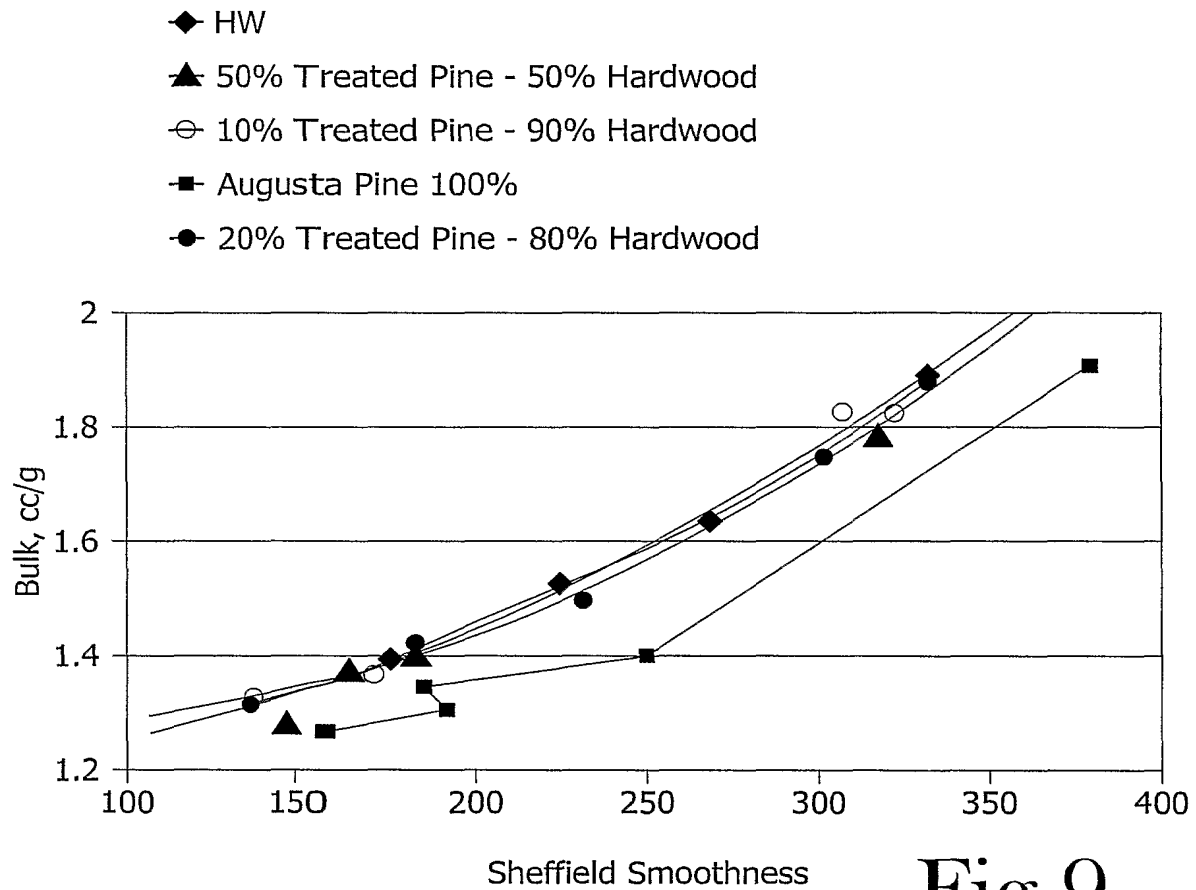**Fig.9**

7/9

### Fiber Length Reduction by "Low-Intensity" Disc Refining

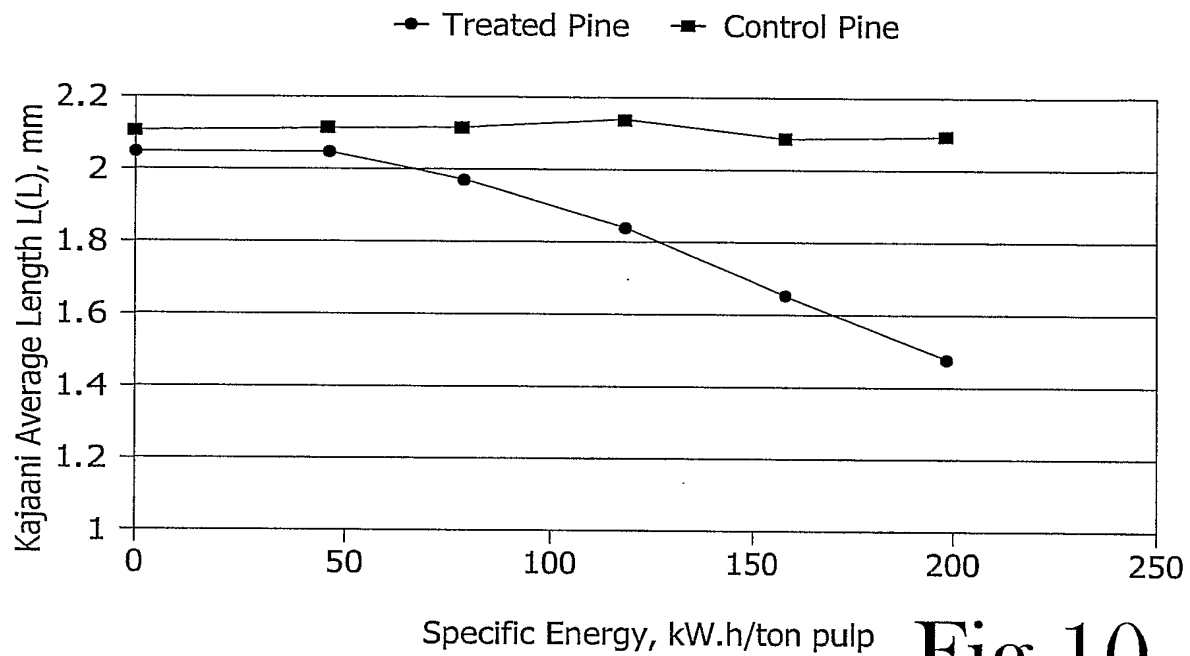**Fig.10**



8/9

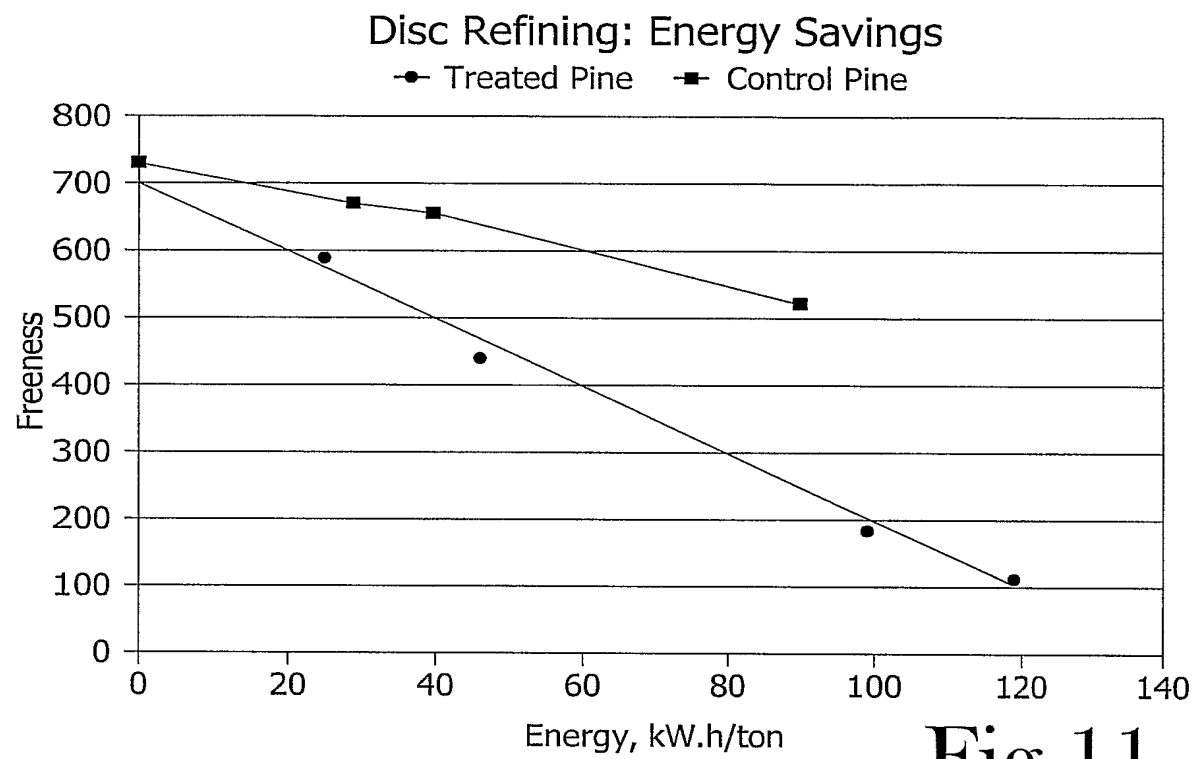
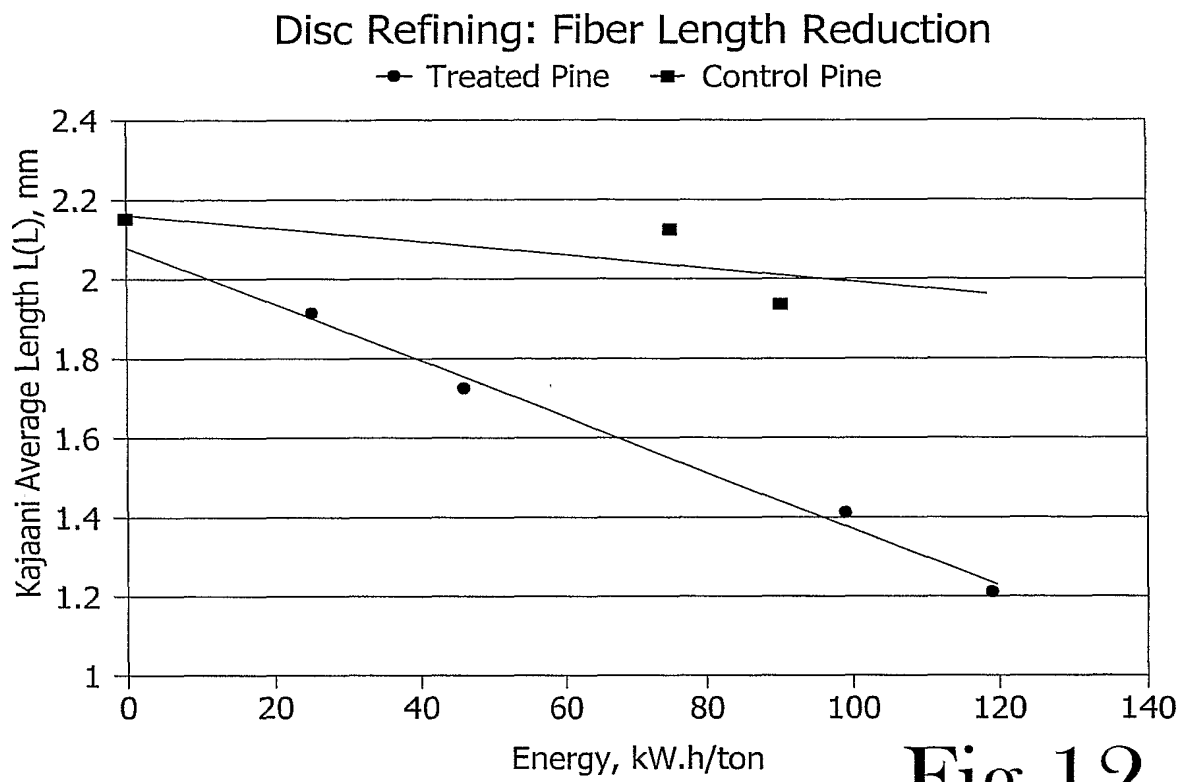


Fig.11

9/9

**Fig.12**

## INTERNATIONAL SEARCH REPORT

PCT/IB2004/003080

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 D21C9/16 C08B1/00 D21B1/14 D21H11/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D21C C08B D21B D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 512 338 A (KLUG EUGENE D ET AL) 20 June 1950 (1950-06-20) the whole document -----	1-19
A	US 4 270 976 A (SANDSTROM AKE O ET AL) 2 June 1981 (1981-06-02) the whole document -----	1-19
A	US 5 002 635 A (GENTILE JR VICTOR M ET AL) 26 March 1991 (1991-03-26) column 4, line 63 - column 5, line 48 page 8, column 36 - column 49 claims 1,2; examples 1,2,A -----	1-19



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## ° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

12 January 2005

Date of mailing of the international search report

24/01/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Contet, F

## INTERNATIONAL SEARCH REPORT

PCT/IB2004/003080

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2512338	A	20-06-1950	NONE		
US 4270976	A	02-06-1981	BR	7707797 A	08-08-1978
			CA	1112816 A1	24-11-1981
			DE	2752081 A1	01-06-1978
			FI	773521 A ,B	24-05-1978
			FR	2371544 A1	16-06-1978
			GB	1590704 A	10-06-1981
			JP	53065401 A	10-06-1978
			JP	62060298 U	14-04-1987
			SE	7613088 A	24-05-1978
			SE	7703137 A	19-09-1978
US 5002635	A	26-03-1991	US	4849053 A	18-07-1989
			AR	243622 A1	31-08-1993
			AU	663781 B2	19-10-1995
			AU	3984493 A	19-08-1993
			AU	605745 B2	24-01-1991
			AU	6225386 A	07-04-1987
			AU	6658290 A	31-01-1991
			BR	8606875 A	03-11-1987
			CA	1274657 A1	02-10-1990
			DE	3676490 D1	07-02-1991
			EP	0239583 A1	07-10-1987
			ES	2002755 A6	01-10-1988
			MX	174399 B	13-05-1994
			PT	83406 A ,B	01-10-1986
			WO	8701746 A1	26-03-1987

**DERWENT-ACC-NO:** 2005-260997

**DERWENT-WEEK:** 200829

*COPYRIGHT 2008 DERWENT INFORMATION LTD*

**TITLE:** Modulating morphology of cellulosic fibers used to manufacture paper web material, comprises subjecting fibers to metal ion-activated peroxide treatment carried out at specified pH, and subjecting treated fibers to refining treatment

**INVENTOR:** MAURER K; MAURER K L ; NGUYEN X ; NGUYEN X C O I ; TAN Z ; TAN Z C O I

**PATENT-ASSIGNEE:** INT PAPER CO[INTO] , MAURER K L[MAURI] , NGUYEN X[NGUYI] , TAN Z[TANZI]

**PRIORITY-DATA:** 2003US-668387 (September 23, 2003)

**PATENT-FAMILY:**

<b>PUB-NO</b>	<b>PUB-DATE</b>	<b>LANGUAGE</b>
US 20050061455 A1	March 24, 2005	EN
WO 2005028744 A1	March 31, 2005	EN
EP 1668180 A1	June 14, 2006	EN
CN 1856616 A	November 1, 2006	ZH
EP 1668180 B1	August 1, 2007	EN
DE 602004007942 E	September 13, 2007	DE
EP 1862587 A2	December 5, 2007	EN
DE 602004007942 T2	April 17, 2008	DE

**DESIGNATED-STATES:** AE AG AL AM AT AU AZ BA BB BG BR BW  
 BY BZ CA CH CN CO CR CU CZ DE DK DM  
 DZ EC EE EG ES FI GB GD GE GH GM HR HU  
 ID IL IN IS JP KE KG KP KR KZ LC LK LR LS  
 LT LU LV MA MD MG MK MN MW MX MZ  
 NA NI NO NZ OM PG PH PL P T RO RU SC SD  
 SE SG SK SL SY TJ TM TN TR TT TZ UA UG  
 US UZ VC VN YU ZA ZM ZW AT BE BG BW  
 CH CY CZ DE DK EA EE ES FI FR GB GH GM  
 GR HU IE IT KE LS LU MC MW MZ NA NL  
 OA PL PT RO SD SE SI SK SL SZ TR TZ UG  
 ZM ZW AT BE BG CH CY CZ DE DK EE ES FI  
 FR GB GR HU I E IT LI LU MC NL PL PT RO  
 SE SI SK TR AT BE BG CH CY CZ DE DK EE  
 ES FI FR GB GR HU IE IT LI LU MC NL PL PT  
 RO SE SI SK TR AT BE BG CH CY CZ DE DK  
 EE ES FI FR GB GR HU IE IT LI LU MC NL PL  
 PT RO SE SI SK TR

**APPLICATION-DATA:**

<b>PUB-NO</b>	<b>APPL-DESCRIPTOR</b>	<b>APPL-NO</b>	<b>APPL-DATE</b>
US20050061455A1	N/A	2003US-668387	September 23, 2003
CN 1856616A	N/A	2004CN-80027582	September 22, 2004
DE602004007942E	N/A	2004DE-60007942	September 22, 2004
DE602004007942T2	N/A	2004DE-60007942	September 22, 2004
EP 1668180A1	N/A	2004EP-769444	September 22, 2004
EP 1668180B1	N/A	2004EP-769444	September 22, 2004
WO2005028744A1	N/A	2004WO-IB003080	September 22, 2004

EP 1668180A1	N/A	2004WO- IB003080	September 22, 2004
EP 1668180B1	N/A	2004WO- IB003080	September 22, 2004
DE602004007942E	N/A	2004WO- IB003080	September 22, 2004
DE602004007942T2	N/A	2004WO- IB003080	September 22, 2004
EP 1862587A2	Based on	2007EP- 012839	September 22, 2004

**INT-CL-CURRENT:**

<b>TYPE</b>	<b>IPC DATE</b>
CIPP	D21C9/00 20060101
CIPP	D21C9/16 20060101
CIPP	D21C9/16 20060101
CIPS	C08B1/00 20060101
CIPS	C08B1/00 20060101
CIPS	D21B1/14 20060101
CIPS	D21B1/14 20060101
CIPS	D21B1/16 20060101
CIPS	D21C9/16 20060101
CIPS	D21H11/16 20060101
CIPS	D21H11/16 20060101

**RELATED-ACC-NO:** 2007-506291**ABSTRACTED-PUB-NO:** US 20050061455 A1**BASIC-ABSTRACT:**

**NOVELTY** - Morphology of cellulosic fibers is modulated by subjecting fibers to metal ion-activated peroxide treatment carried out at a pH of 1-9, and subjecting the treated fibers to a refining treatment.

**DESCRIPTION - INDEPENDENT CLAIMS** are also included for:

(A) a softwood pulp having a modified morphology, leading to paper making properties functionally equivalent to hardwood pulp papermaking properties; and

(B) pulp comprising 50-90% hardwood pulp and the remainder being softwood pulp which has been subjected to a metal ion-activated peroxide treatment carried out at a pH of 2-9 and a refining treatment.

**USE** - For modulating the morphology of cellulosic fibers used to manufacture a paper web material (claimed).

**ADVANTAGE** - The fibers of the softwood pulp, after treatment, exhibit a shorter fiber length and distribution, and enhanced fiber collapsibility, than prior to treatment. The pulp exhibits a Canadian Standard Freeness of 115-590, and exhibits a Kajaani average fiber length of between 1-1.9 mm.

**DESCRIPTION OF DRAWING(S)** - The figure is a graph depicting the energy savings when refining Southern Pine pulp.

## **EQUIVALENT-ABSTRACTS:**

### **INORGANIC CHEMISTRY**

**Preferred Composition:** The peroxide is present with the solution at 0.2-5% based on pulp. The metal ion is present in the solution at 0.002-0.1% on pulp.

### **METALLURGY**

**Preferred Material:** The metal ion is a transitional metal ion, preferably iron.

### **ORGANIC CHEMISTRY**

**Preferred Composition:** The peroxide is present with the solution at 0.2-5% based on pulp. The metal ion is present in the solution at 0.002-0.1% on pulp.



## TEXTILES AND PAPER

**Preferred Method:** The fibers are subjected to the solution at 40-120degreesC for 10 minutes to 10 hours. The pulp is subjected to the solution for a time to act on at least the cellulose and hemi-cellulose of the pulp, causing oxidation and oxidative degradation of cellulose fibers.

**Preferred Parameter:** The pH is 3-7.

Bleached southern pine was treated with 1% hydrogen peroxide based on pulp at pH 4, with 0.006% iron (II) as from ferrous sulfate. The treatment was carried out at 70degreesC for 1 hour. The treated pulp was then refined to make TAPPI hand sheets.

**CHOSEN-DRAWING:** Dwg.1/12

**TITLE-TERMS:** MODULATE MORPHOLOGY CELLULOSIC  
FIBRE MANUFACTURE PAPER WEB  
MATERIAL COMPRISE SUBJECT METAL ION  
ACTIVATE PEROXIDE TREAT CARRY  
SPECIFIED PH REFINE

**DERWENT-CLASS:** F09

**CPI-CODES:** F05-A02B;

**SECONDARY-ACC-NO:**

**CPI Secondary Accession Numbers:** 2005-082496